


### 结构图

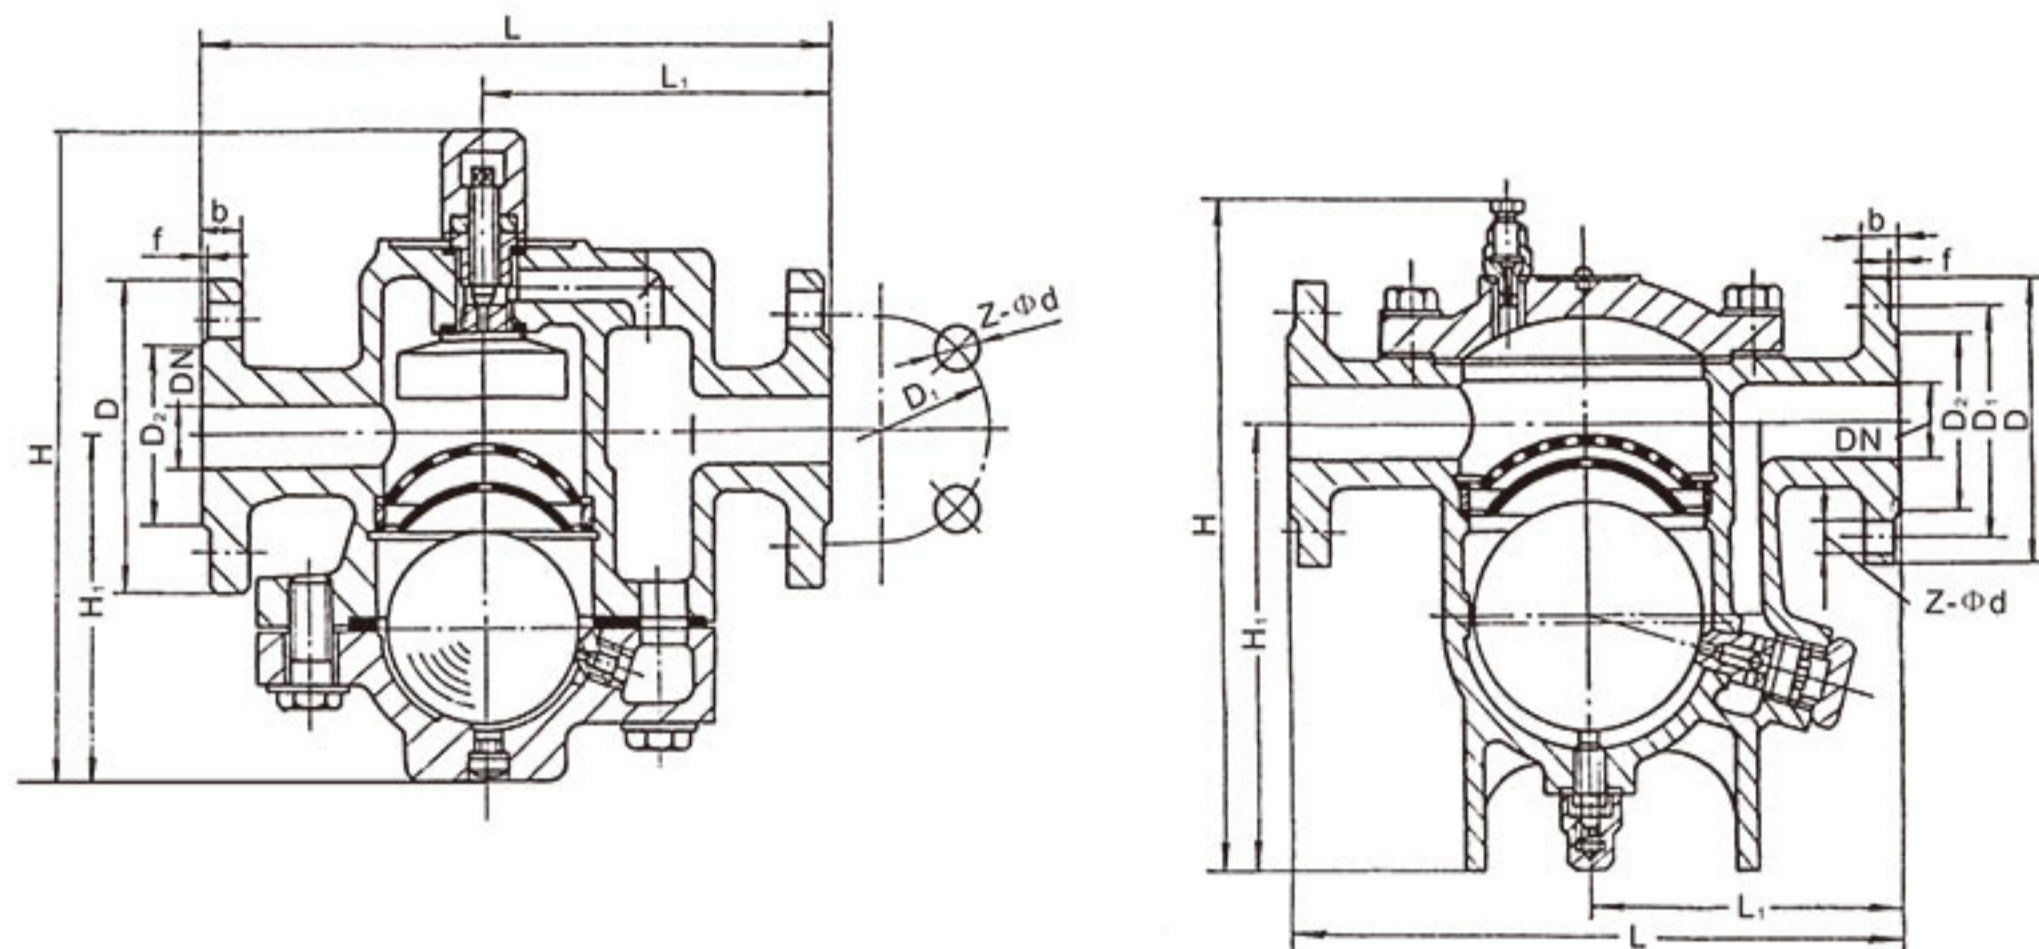

### 主要外形尺寸及连接尺寸

公称压力 PN/MPa	公称通径 DN/mm	工作压差/MPa					
		0.05	0.2	0.5	0.8	1.2	1.6
1.6	15、20	160	300	-	-	-	-
		110	250	360	-	-	-
		90	200	280	290	-	-
		50	120	180	210	260	-
		40	80	140	170	210	260
		1400	2800	-	-	-	-
	25	1000	1800	3100	-	-	-
		800	1400	2500	3500	-	-
		600	1100	2000	2900	3800	-
		500	900	1800	2600	3300	3800

### 主要外形尺寸及连接尺寸

公称压力 PN/MPa	公称通径 DN/mm	最高工作 压力/MPa	阀座号	不同压差(MPa)下的排量/(kg/h)						
				0.15	0.4	0.8	1.0	1.2	1.6	
1.6	15	0.15	3N1.5	300	-	-	-	-	-	
		0.4	3N4	163	250	-	-	-	-	
		20	0.8	3N8	117	202	285	-	-	-
			1.0	3N10	88	119	165	190	-	-
		25	1.2	3N12	81	114	160	182	189	-
			1.6	3N16	66	88	118	125	134	148
	40	0.15	5N1.5	766	-	-	-	-	-	
		0.4	5N4	463	627	-	-	-	-	
		0.8	5N8	360	495	715	-	-	-	
		1.0	5N10	275	455	650	705	-	-	
		1.2	5N12	290	397	552	615	645	-	
		1.6	5N16	245	370	510	555	585	620	
	50	0.15	7N1.5	3150	-	-	-	-	-	
		0.4	7N4	1687	2412	-	-	-	-	
		0.8	7N8	1125	1620	2180	-	-	-	
		1.0	7N10	950	1320	1850	2050	-	-	
		1.2	7N12	900	1287	1422	1800	1940	-	
		1.6	7N16	770	1230	1450	1580	1700	1920	
	100	0.15	7.5N1.5	10800	-	-	-	-	-	
		0.4	7.5N4	6120	8500	-	-	-	-	
		0.8	7.5N8	3600	5200	6700	-	-	-	
		1.0	7.5N10	3100	4500	5900	6300	-	-	
		1.2	7.5N12	3150	4050	5200	5700	6100	-	
		1.6	7.5N16	2520	3510	4500	4860	5350	5850	

公称压力 PN/MPa	公称通径 DN/mm	最高工作 压力/MPa	阀座号	不同压差(MPa)下的排量/(kg/h)					
				1.6	2.0	2.5	3.0	3.5	4.0
4.5	15	2.5	5N25	384	425	475	-	-	-
		4.0	5N40	265	300	330	360	390	420
	25	2.5	7N25	1500	1700	1900	-	-	-
		4.0	7N40	800	910	1010	1100	1200	1300
	40	2.5	7.5N25	3500	4300	4500	-	-	-
		4.0	7.5N40	3100	3300	3700	4100	4500	5100